


# MULTI-CONDUCTOR FOIL SHIELD 80°C

CSA/FT4/UL

- Conductor** Stranded tinned copper
- Insulation** 600V Colour coded Polyethylene
- Jacket** Grey PVC
- Temperature** -20°C to 80°C
- Shield** Overall 100% aluminum/polyester with stranded tinned copper drain wire.
- Approvals** CSA Certified CMG/UL listed to CM harmonized standard C22.2 No.214 and UL 444  
 Certified to CSA standard C22.2 No. 210.2 – Type AWM  
 Passes CSA/FT4 vertical flame test  
 Passes UL 70,000 BTU vertical flame test
- Applications** For use in data transmission, recording studios, broadcast sound systems, electronic and control circuits and signal applications in computers and industrial equipment.

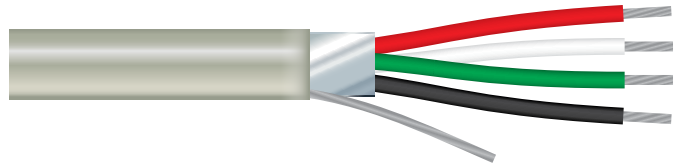

Product Code	AWG Size	# of Cond.	Stranding	Drain Wire Size	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Nominal Cap. (pF/ft)		Cable Weight (lbs/mft)	Colour Code
								A	B		
35D2004	20	4	10/30	24	0.015	0.023	0.219	24	48	29	1
35D1802	18	2	16/30	22	0.015	0.023	0.209	24	48	24	1
35D1803	18	3	16/30	22	0.015	0.023	0.222	18	36	31	1
35D1804	18	4	16/30	22	0.015	0.023	0.241	18	36	38	1
35D1602	16	2	26/30	20	0.015	0.023	0.235	21	42	33	1
35D1603	16	3	26/30	20	0.015	0.023	0.250	20	40	44	1
35D1402	14	2	41/30	18	0.020	0.023	0.283	25	50	49	1
35D1403	14	3	41/30	18	0.020	0.030	0.316	19	38	70	1
35D1404	14	4	41/30	18	0.020	0.030	0.345	19	38	87	1
35D1202	12	2	65/30	16	0.020	0.030	0.337	28	56	74	1
35D1203	12	3	65/30	16	0.020	0.030	0.359	22	44	99	1
35D1204	12	4	65/30	16	0.020	0.030	0.393	22	44	125	1

A – Conductor to conductor    B – 1 Conductor and other conductors connected to shield

# MULTI-CONDUCTOR STRANDED BRAID SHIELD

CSA/FT4/UL

- Conductor** Stranded tinned copper
- Insulation** 600V Colour coded semi-rigid PVC
- Jacket** Grey PVC
- Temperature** -20°C to 105°C
- Shield** Overall 75% tinned copper braid
- Approvals** CSA Certified CMG listed to CM harmonized standard C22.2 No.214 and UL 444  
 Certified to CSA standard C22.2 No. 210.2 – Type AWM  
 UL listed CL2 per standard UL13
- Applications** For use in recording studios, radio transmitters, sound systems and electronic circuits where shielding is required.



Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35E1803	18	3	16/30	0.012	0.023	0.227	46	7
35E1602	16	2	26/30	0.015	0.023	0.248	52	7