


MULTI-CONDUCTOR STRANDED UNSHIELDED

CSA/FT4/UL

Conductor Stranded tinned copper
Insulation 600V Colour coded semi-rigid PVC
Jacket Grey PVC
Temperature -20°C to 105°C

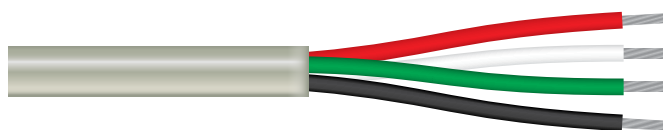

Approvals CSA Certified CMG/UL listed to CM harmonized standard C22.2 No. 214 and UL 444
 Certified to CSA C22.2 No. 210.2 - Type AWM
 Passes CSA/FT4 vertical flame test
 Passes UL 70,000 BTU vertical flame test
 75°C UL listed CMR (Riser) also available


Applications For use in PA systems, unbalanced intercom systems, interconnecting cables, remote control circuits, low voltage, broadcast and studio use, temperature control systems.

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35A2202	22	2	7/30	0.008	0.015	0.130	9	BLK/RED
35A2203	22	3	7/30	0.008	0.015	0.138	12	BLK/RED/GRN
35A2204	22	4	7/30	0.008	0.015	0.150	15	1
35A2205	22	5	7/30	0.008	0.023	0.180	21	1
35A2206	22	6	7/30	0.008	0.023	0.194	25	1
35A2207	22	7	7/30	0.008	0.023	0.194	28	1
35A2208	22	8	7/30	0.008	0.023	0.209	31	1
35A2210	22	10	7/30	0.008	0.023	0.238	38	1
35A2212	22	12	7/30	0.008	0.023	0.249	45	1
35A2215	22	15	7/30	0.008	0.023	0.267	54	2
35A2220	22	20	7/30	0.008	0.023	0.297	70	2
35A2225	22	25	7/30	0.008	0.030	0.350	91	2
35A2230	22	30	7/30	0.008	0.030	0.370	106	2
35A2240	22	40	7/30	0.008	0.030	0.411	137	2
35A2250	22	50	7/30	0.008	0.030	0.452	169	2
35A2002	20	2	7/28	0.009	0.015	0.150	13	1
35A2003	20	3	7/28	0.009	0.015	0.159	18	1
35A2004	20	4	7/28	0.009	0.023	0.190	25	1
35A2005	20	5	7/28	0.009	0.023	0.206	30	1
35A2007	20	7	7/28	0.009	0.023	0.224	40	1
35A2009	20	9	7/28	0.009	0.023	0.259	50	1
35A2012	20	12	7/28	0.009	0.023	0.281	60	1
35A2015	20	15	7/28	0.009	0.030	0.327	84	2
35A2019	20	19	7/28	0.009	0.030	0.352	103	2
35A2025	20	25	7/28	0.009	0.030	0.410	133	2

MULTI-CONDUCTOR STRANDED UNSHIELDED

CSA/FT4/UL

Conductor Stranded tinned copper
Insulation 600V Colour coded semi-rigid PVC
Jacket Grey PVC
Temperature -20°C to 105°C

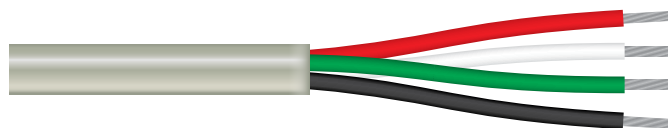

Approvals CSA Certified CMG/UL listed to CM harmonized standard C22.2 No. 214 and UL 444
 Certified to CSA C22.2 No. 210.2 - Type AWM
 Passes CSA/FT4 vertical flame test
 Passes UL 70,000 BTU vertical flame test
 75°C UL listed CMR (Riser) also available

Applications For use in PA systems, unbalanced intercom systems, interconnecting cables, remote control circuits, low voltage, broadcast and studio use, temperature control systems.

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
35A1802	18	2	16/30	0.012	0.023	0.197	21	1
35A1803	18	3	16/30	0.012	0.023	0.209	28	1
35A1804	18	4	16/30	0.012	0.023	0.227	35	1
35A1805	18	5	16/30	0.012	0.023	0.248	43	1
35A1807	18	7	16/30	0.012	0.023	0.270	57	1
35A1809	18	9	16/30	0.012	0.030	0.328	76	1
35A1812	18	12	16/30	0.012	0.030	0.368	99	2
35A1815	18	15	16/30	0.012	0.030	0.397	120	2
35A1819	18	19	16/30	0.012	0.030	0.429	148	2
35A1825	18	25	16/30	0.012	0.032	0.506	194	2
35A1830	18	30	16/30	0.012	0.032	0.536	229	2
35A1840	18	40	16/30	0.012	0.050	0.635	319	2
35A1602	16	2	26/30	0.015	0.023	0.235	31	1
35A1603	16	3	26/30	0.015	0.023	0.250	42	1
35A1604	16	4	26/30	0.015	0.023	0.273	53	1
35A1605	16	5	26/30	0.015	0.023	0.300	65	2
35A1606	16	6	26/30	0.015	0.030	0.341	82	2
35A1607	16	7	26/30	0.015	0.030	0.341	92	2
35A1609	16	9	26/30	0.015	0.030	0.397	117	2
35A1612	16	12	26/30	0.015	0.030	0.448	151	2
35A1615	16	15	26/30	0.015	0.032	0.488	187	2
35A1619	16	19	26/30	0.015	0.035	0.524	250	2
35A1625	16	25	26/30	0.015	0.050	0.658	323	2
35A1402	14	2	41/30	0.020	0.023	0.283	45	1
35A1403	14	3	41/30	0.020	0.030	0.316	67	1
35A1404	14	4	41/30	0.020	0.030	0.345	85	1
35A1405	14	5	41/30	0.020	0.030	0.379	103	2
35A1407	14	7	41/30	0.020	0.030	0.413	139	2
35A1412	14	12	41/30	0.020	0.032	0.552	232	2
35A1415	14	15	41/30	0.020	0.050	0.633	306	2
35A1202	12	2	65/30	0.030	0.030	0.378	76	1 or 7
35A1203	12	3	65/30	0.030	0.030	0.403	105	1
35A1204	12	4	65/30	0.030	0.030	0.442	135	1
35A1002	10	2	105/30	0.030	0.030	0.457	113	1