

# MULTI-PAIR STRANDED EACH PAIR FOIL SHIELD

CSA/FT4/UL

**Conductor** Stranded tinned copper

**Insulation** 600V Colour coded Polyethylene


**Jacket** Grey PVC

**Temperature** -20°C to 80°C

**Shield** Individual 100% aluminum/polyester with stranded tinned copper drain wire for each pair.

**Approvals** CSA Certified CMG or to CM harmonized standard C22.2 No.214 and UL 444  
 Certified to CSA standard C22.2 No. 210.2 – Type AWM  
 UL listed CL2 per standard UL13

**Applications** For audio, RF and pulse and applications requiring superior circuit isolation. Excellent high frequency properties and mechanical durability.

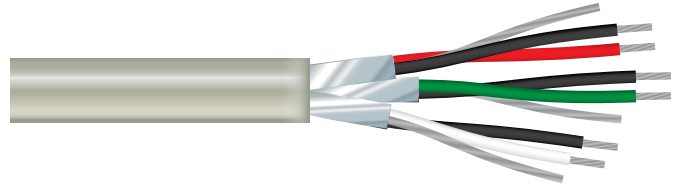

Product Code	AWG Size	# of Pairs	Strand	Drain Wire Size	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Nominal Cap. (pF/ft)		Cable Weight (lbs/mft)	Colour Code
								A	B		
35H2402	24	2	7/32	24	0.009	0.023	0.165	24	48	17	3
35H2203	22	3	7/30	24	0.009	0.023	0.260	26	52	31	3
35H2204	22	4	7/30	24	0.009	0.023	0.284	26	52	39	3
35H2206	22	6	7/30	24	0.009	0.023	0.341	26	52	56	3
35H2209	22	9	7/30	24	0.009	0.023	0.400	26	52	79	3
35H2227	22	27	7/30	24	0.009	0.045	0.690	26	52	242	3
35H2002	20	2	10/30	24	0.009	0.023	0.200	30	60	27	3
35H2003	20	3	10/30	24	0.009	0.023	0.286	30	60	41	3
35H2004	20	4	10/30	24	0.009	0.023	0.313	30	60	52	3
35H2012	20	12	10/30	24	0.009	0.045	0.547	30	60	161	3
35H1802	18	2	16/30	22	0.012	0.023	0.237	30	60	38	3
35H1803	18	3	16/30	22	0.012	0.023	0.344	30	60	58	3
35H1804	18	4	16/30	22	0.012	0.023	0.378	30	60	73	3
35H1806	18	6	16/30	22	0.012	0.045	0.502	30	60	127	3
35H1809	18	9	16/30	22	0.012	0.045	0.584	30	60	177	3
35H1812	18	12	16/30	22	0.012	0.045	0.659	30	60	226	3
35H1815	18	15	16/30	22	0.012	0.045	0.711	30	60	274	3
35H1602	16	2	26/30	20	0.015	0.023	0.285	31	62	58	3
35H1603	16	3	26/30	20	0.015	0.045	0.462	31	62	107	3
35H1604	16	4	26/30	20	0.015	0.045	0.504	31	62	133	3

**A** – Conductor to conductor    **B** – 1 Conductor and other conductors connected to shield