


CATEGORY 6 CMP - PLENUM


Product Description	This cable provides exceptional value for jobs that require standards compliant Category 6 at a cost-effective price.	
Conductor	Solid annealed copper	
Insulation	FEP	
Insulation Colours	Pair 1: ColorTip Light Blue, Blue	Pair 2: ColorTip Light Orange, Orange
Jacket	Pair 3: ColorTip Light Green, Green	Pair 4: ColorTip Light Brown, Brown
Approvals	Flame retardant, low smoke PVC	
Applications	UL Verified CAT 6	
Packaging	UL444	
	UL Listed CMP (NFPA 262)	
	ANSI/TIA/EIA-568-B.2-1	
	ANSI/TIA-568-C.2	
	RoHS- compliant	
	10BASE-T through 1000BASE-T ethernet, ATM and token ring	
	X 1000 FT Plywood Reel	

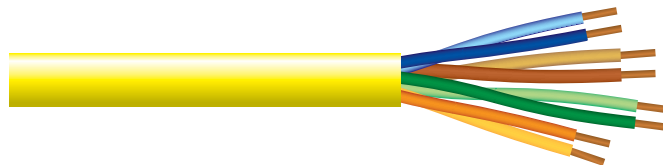

Product Code	AWG	Pair Count	Nominal Diameter in (mm)	Approx. Weight lbs/kft (kg/km)	Jacket Colours
42ZC2404	23	4	0.22 (5.5)	25 (37)	Blue, Grey, White, Green, Yellow, , Orange, Black

OUTSIDE PLANT FIGURE 8

Product Description	Suited for aerial installations. The core and support member (messenger) lay parallel to each other forming a cross-sectional "figure 8." The support messenger is an integral part of the cable sheath, yet readily available for gripping, pulling and tensioning.	
Conductor	Solid annealed copper	
Insulation	Polyolefin, colour coded	
Jacket	Black, Polyethylene	
Shield	Corrugated copolymer-coated, 8 mil aluminum tape applied longitudinally with an overlap	
Approvals	ANSI/ICEA S-85-625-2007	
Applications	RoHS-Compliant	
	Aerial	

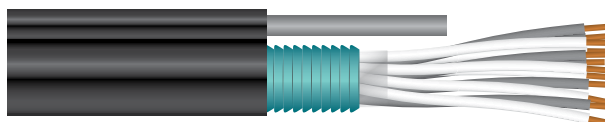

Product Code	AWG (mm)	# of Pairs	Nominal Diameter (cable only) in (mm)	Nominal Diameter (with messenger) in (mm)	Approx. Weight lbs/kft (kg/km)	Colour Code
37B2206	22 (0.64)	6	0.38 (9.7)	0.87 (22)	200 (300)	5
37B2212	22 (0.64)	12	0.45 (11)	0.94 (24)	235 (350)	5