


CATEGORY 6 CMP - PLENUM


Product Description	This cable provides exceptional value for jobs that require standards compliant Category 6 at a cost-effective price.
Conductor	Solid annealed copper
Insulation	FEP
Insulation Colours	Pair 1: ColorTip Light Blue, Blue Pair 2: ColorTip Light Orange, Orange Pair 3: ColorTip Light Green, Green Pair 4: ColorTip Light Brown, Brown
Jacket	Flame retardant, low smoke PVC
Approvals	UL Verified CAT 6 UL444 UL Listed CMP (NFPA 262) ANSI/TIA/EIA-568-B.2-1 ANSI/TIA-568-C.2 RoHS- compliant
Applications	10BASE-T through 1000BASE-T ethernet, ATM and token ring
Packaging	X 1000 FT Plywood Reel

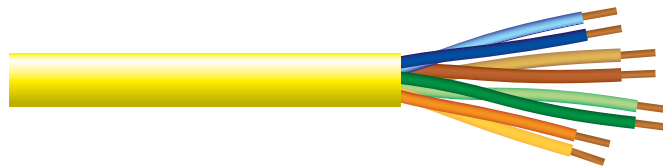

Product Code	AWG	Pair Count	Nominal Diameter in (mm)	Approx. Weight lbs/kft (kg/km)	Jacket Colours
42ZC2404	23	4	0.22 (5.5)	25 (37)	Blue, Grey, White, Green, Yellow, , Orange, Black

OUTSIDE PLANT FIGURE 8

Product Description	Suited for aerial installations. The core and support member (messenger) lay parallel to each other forming a cross-sectional "figure 8." The support messenger is an integral part of the cable sheath, yet readily available for gripping, pulling and tensioning.
Conductor	Solid annealed copper
Insulation	Polyolefin, colour coded
Jacket	Black, Polyethylene
Shield	Corrugated copolymer-coated, 8 mil aluminum tape applied longitudinally with an overlap
Approvals	ANSI/ICEA S-85-625-2007 RoHS-Compliant
Applications	Aerial

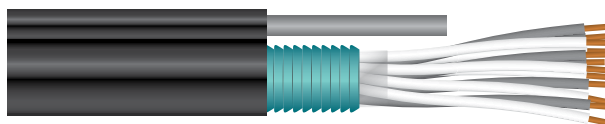

Product Code	AWG (mm)	# of Pairs	Nominal Diameter (cable only) in (mm)	Nominal Diameter (with messenger) in (mm)	Approx. Weight lbs/kft (kg/km)	Colour Code
37B2206	22 (0.64)	6	0.38 (9.7)	0.87 (22)	200 (300)	5
37B2212	22 (0.64)	12	0.45 (11)	0.94 (24)	235 (350)	5