


MULTI-CONDUCTOR STRANDED - PLENUM

CSA/FT6

Conductor Stranded tinned copper
Insulation 300V Colour coded fire retardant PVC
Jacket Grey PVC
Temperature 60°C

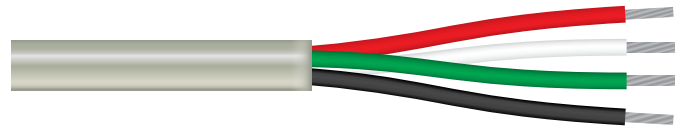

Approvals UL listed CMP to harmonized standard C22.2 No.214 and UL 444
 Passes CSA/FT6 flame and smoke test
 Passes UL 910 flame and smoke test

Applications PA systems, unbalanced intercom systems, interconnecting cables, remote control circuits, low voltage, broadcast and studio use, temperature control systems.

Product Code	AWG Size	# of Cond.	Stranding	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Cable Weight (lbs/mft)	Colour Code
42AA2202	22	2	7/30	0.008	0.015	0.124	9	1
42AA2203	22	3	7/30	0.008	0.015	0.133	12	1
42AA2204	22	4	7/30	0.008	0.015	0.143	16	1
42AA2206	22	6	7/30	0.008	0.015	0.171	22	1
42AA2208	22	8	7/30	0.008	0.015	0.188	28	1
42AA2210	22	10	7/30	0.008	0.015	0.219	35	1
42AA2212	22	12	7/30	0.008	0.015	0.230	42	1
42AA2002	20	2	7/28	0.008	0.015	0.147	14	1
42AA1802	18	2	7/26	0.008	0.015	0.160	18	1
42AA1803	18	3	7/26	0.008	0.015	0.171	25	1
42AA1804	18	4	7/26	0.008	0.015	0.185	32	1
42AA1805	18	5	7/26	0.008	0.015	0.206	39	1
42AA1806	18	6	7/26	0.008	0.015	0.225	46	1
42AA1808	18	8	7/26	0.008	0.015	0.245	61	1
42AA1809	18	9	7/26	0.008	0.015	0.273	68	1
42AA1810	18	10	7/26	0.008	0.015	0.291	75	1
42AA1602	16	2	19/29	0.012	0.015	0.190	24	1
42AA1603	16	3	19/29	0.012	0.015	0.210	33	1
42AA1604	16	4	19/29	0.012	0.015	0.231	43	1
42AA1402	14	2	19/27	0.015	0.015	0.227	38	1
42AA1404	14	4	19/27	0.015	0.015	0.291	70	1
42AA1202	12	2	19/25	0.015	0.015	0.286	56	1

