

TYPE W ROUND SINGLE CONDUCTOR PORTABLE POWER CABLE

Conductor Annealed bare copper flexible rope-lay-stranded


Insulation Colour coded synthetic rubber

Jacket Extra hard usage black, oil and weather resistant CPE

Temperature -40°C to +90°C

Voltage 600/2000V

Applications Designed for portable power and lighting in industrial, mining and entertainment applications.

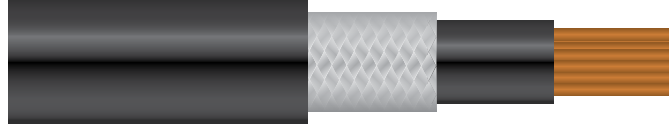

****Approvals** UL, MSHA, RoHS Compliant

Packaging Long length Reels cut to length.

Reinforcement An open reinforcement is applied over the assembly for mechanical strength.

Product Code	Cond. Size	# of Cond.	Cond. Strand	Nom. Insul. Thickness (Inches)	Nom. O.D. (Inches)	AMPS*	Ship. Weight lbs/mft
16A0201	2	1	259	.070	.680	190	389
16A0101	1	1	259	.090	.765	220	485
16A01	1/0	1	259	.090	.810	260	565
16A001	2/0	1	259	.090	.885	300	681
16A0001	3/0	1	259	.090	.930	350	810
16A00001	4/0	1	259	.090	.980	405	975
16A2501	250	1	627	.105	1.045	455	1160
16A3501	350	1	855	.105	1.145	570	1490
16A5001	500	1	1235	.105	1.310	700	2045

*Ampacities (Amps per conductor) are based on 30°C ambient temperature in air, 90°C conductor temperature.

**Contact your local branch for availability of CSA approved product.