


DLO DIESEL LOCOMOTIVE CABLE

Conductor Extra Flexible annealed tinned copper
Insulation EPR rubber
Jacket Extra hard usage black, oil and weather resistant CPE thermoset

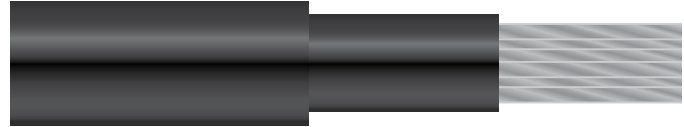

Temperature -40°C to +90°C
Voltage 1000V

Applications Designed for the wiring of diesel electric locomotives and rail car equipment. Also recommended for high flexible uses such as motor or generator leads, battery lead wires, jumper leads and offshore drilling rig applications.

****Approvals** CSA FT4, UL, OSHA, ICEA-Nema Standards, IEEE 383, Tray Rated, RoHS, MSHA

Packaging Long length Reels cut to length

Product Code	Cond. Size	# of Cond.	Cond. Strand	Nom. Insul. Thickness (Inches)	Nom. O.D. (Inches)	AMPS*	Ship. Weight lbs/mft
16D0201A	2	1	147x.0201	0.06	0.52	184	295
16D01A	1/0	1	275x.0201	0.08	0.69	268	515
16D001A	2/0	1	324x.0201	0.08	0.73	298	580
16D0001A	3/0	1	448x.0201	0.08	0.81	342	770
16D00001A	4/0	1	551x.0201	0.08	0.87	415	930
16D26201A	262	1	646x.0201	0.095	1	461	1130
16D31301A	313	1	779x.0201	0.095	1.06	514	1295
16D37301A	373	1	925x.0201	0.095	1.1	575	1545
16D44401A	444	1	1110x.0202	0.095	1.23	641	1820
16D53501A	535	1	1332x.0203	0.12	1.34	720	2195
16D64601A	646	1	1591x.0204	0.11	1.45	811	2560
16D77701A	777	1	1924x0205	0.11	1.5	911	3050
16D111101A	1111	1	2745x.0206	0.125	1.84	1139	4354

*Ampacities (Amps per conductor) are based on 30°C ambient temperature in air, 90°C conductor temperature.

**2 AWG not listed 1/0 thru 3/0 CSA type RW90 EP 1KV, UL type RHH or RHW 2KV VW-1

**4/0 CSA type RW90 EP 1KV, UL type RHH OR RHW 2KV VW-2 IEEE 383

**262 MCM and larger (excluding 535 MCM) CSA type AWM I/II A/B 600V, IEEE 383

**535 MCM CSA as type RW90 EP 1KV, UL type RHH or RHW-2 2KV VW-1, IEEE 383

**1111 MCM not listed.