


MULTI-PAIR STRANDED EACH PAIR FOIL SHIELD MINIATURE CSA/FT4/UL

- Conductor** Stranded tinned copper
- Insulation** 600V Colour coded Polyolefin
- Jacket** Grey PVC
- Temperature** -20°C to 80°C
- Shield** Individual 100% aluminum/polyester with common stranded tinned copper drain wire
- Approvals** CSA Certified CMG or to CM harmonized standard C22.2 No.214 and UL 444
Certified to CSA standard C22.2 No. 210.2 – Type AWM
UL listed CL2 per standard UL13
- Applications** For use in recording studios and broadcast sound systems. Requires up to 2/3 less space than standard broadcast cables.




Product Code	AWG Size	# of Pairs	Stranding	Drain Wire Size	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Nominal Cap. (pF/ft)		Cable Weight (lbs/mft)	Colour Code
								A	B		
35HB2202	22	2	7/30	24	0.008	0.020	0.174	29	58	18	8

A – Conductor to conductor B – 1 Conductor and other conductors connected to shield

MULTI-PAIR STRANDED EACH PAIR FOIL SHIELD 105°C CSA/FT4/UL

- Conductor** Stranded tinned copper
- Insulation** 600V Colour coded semi-rigid PVC
- Jacket** Grey PVC
- Temperature** -20°C to 105°C
- Shield** Individual 100% aluminum/polyester with common stranded tinned copper drain wire for each pair.
- Approvals** CSA Certified CMG or to CM harmonized standard C22.2 No.214 and UL 444
Certified to CSA standard C22.2 No. 210.2 – Type AWM
UL listed CL2 per standard UL13
- Applications** For use in recording studios and broadcast sound systems. Requires up to 2/3 less space than standard broadcast cables.

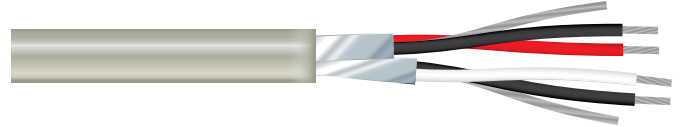

Product Code	AWG Size	# of Pairs	Stranding	Drain Wire Size	Insulation Thickness (inches)	Jacket Thickness (inches)	Nominal O.D. (inches)	Nominal Cap. (pF/ft)		Cable Weight (lbs/mft)	Colour Code
								A	B		
35HD1802	18	2	16/30	22	0.012	0.023	0.245	45	39	3	3